



ADIS


Safety door system components




Centre stile
FA 1049

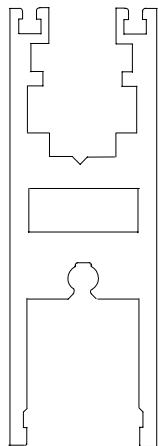


top-bottom rail
FA 1047

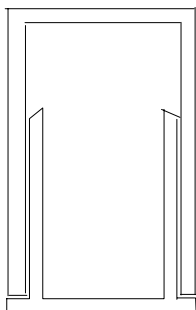


Top channel with
snap in filler




Sidelight channel

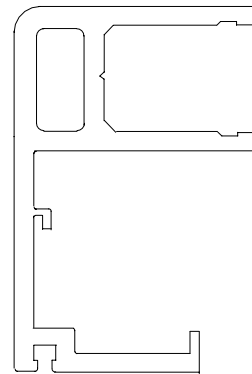


interlock stile
FA 1046



sidelight sub-sill
FA 1048



PVC Male seal



PVC Female seal



Weather seal
pile



40mm Glazing rubber
for 12mm glass



3mm glazing rubber
for 10mm glass



Nylon floor guide

NG-A Safety door system can be glazed with varying thickness glass from 10 to 15mm thick depending on wind load and size of door panels. Check with ADIS glass tech data bulletin for details.

